


SPECIFICATION SHEET

GALUX PRO



LED Cylinder Aura

Light distribution

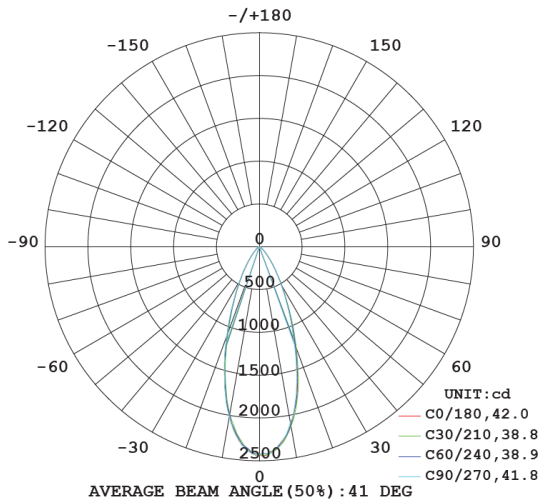

Technical Characteristics

Nominal Power	14W
Total Lumen	1380 LM
LED Type	COB (Philips)
CCT	3000°k-6000°K
CRI	82
Beam Angle	41°
Protection	IP23
SDCM.	<5
Dimension	H:150*D:90mm
Weight	0.5 Kg
Mounting	Surface
Warranty	5 years

Electrical Characteristics

Power Supply	LED Driver (Tridonic)
Voltage Range	220-240V
Power Factor	>0.95
Current (RMS)	0.0663mA

Materials

Body	Alu section
Emitting surface	Poly carbonate
Reflector	Specular

Life time

L70 (hours)	>54000h
-------------	---------

Code	Type	CCT
Aura.14.K30.T2P2	LED Cylinder Surface Aura 14W	3000K
Aura.14.K40.T2P2	LED Cylinder Surface Aura 14W	4000K
Aura.14.K60.T2P2	LED Cylinder Surface Aura 14W	6000K

* K--: describes the CCT of Lighting fixture, Example K30 define that CCT is 3000°K