



SPECIFICATION SHEET

GALUX PRO

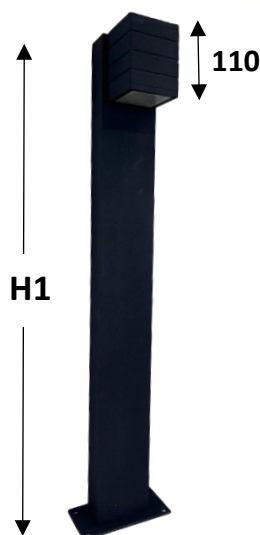

LED Lighting Bollard Guard With adjustable head

Light distribution

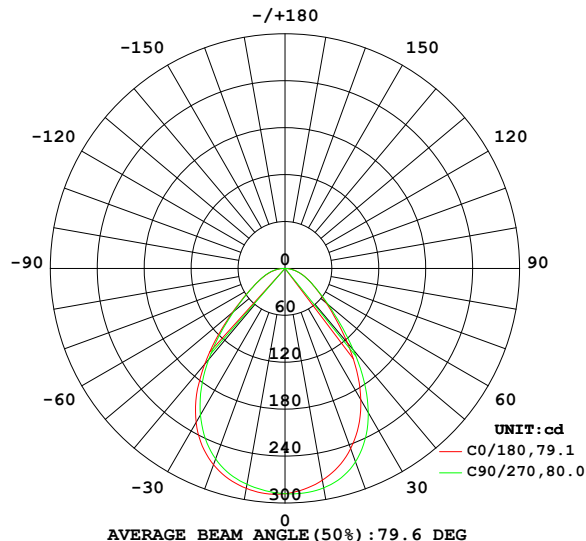

Technical Characteristics

Nominal Power	8W
Total Lumen	600 LM
LED Type	LED SMD
CCT	3000-4000°K
CRI	>80
Beam Angle	80°
Protection (IP/IK)	IP65
Operation Temp.	-10 to 55 °C
Dimension(mm)	H1:600-950 Base:80*160
Weight	2.7 Kg
Mounting	Ground mounted
Warranty	5 years

Electrical Characteristics

Power Supply	LED Driver (Osram)
Voltage Range	200-240Vac
Power Factor	>0.95
Current (RMS)	0.043

Materials

Body	Electrostatically coated Alu. Sections
Emitting surface	Poly-Carbonate
Reflector	Textured Reflector

Code

Guard70.8.K---
Guard85.8.K---
Guard95.8.K---

Type

LED Bollard (Guard) Height 70cm
LED Bollard (Guard) Height 85cm
LED Bollard (Guard) Height 95cm

CCT

3000°K / 4000°K
3000°K / 4000°K
3000°K / 4000°K