SPEFICATION SHEET

GALUX PRO

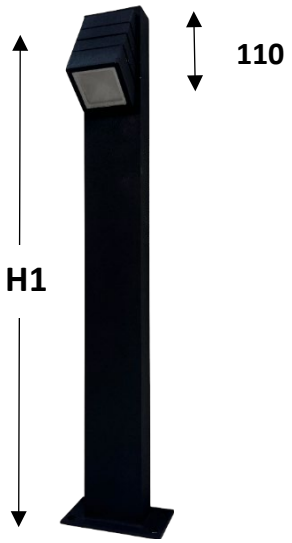

LED Lighting Bollard Luster

Light distribution

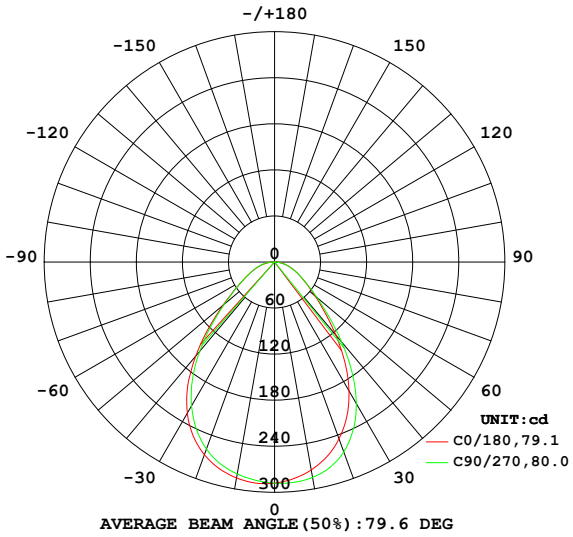

Technical Characteristics

Nominal Power	8W
Total Lumen	600 LM
LED Type	LED SMD
CCT	3000-4000°K
CRI	>80
Beam Angle	80°
Protection (IP/IK)	IP65
Operation Temp.	-10 to 55 °C
Dimension(mm)	H1:600-950 Base:80*160
Weight	2.8 Kg
Mounting	Ground mounted
Warranty	5 years

Electrical Characteristics

Power Supply	LED Driver (Osram)
Voltage Range	200-240Vac
Power Factor	>0.95
Current (RMS)	0.043

Materials

Body	Electrostatically coated Alu. Sections
Emitting surface	Poly-Carbonate
Reflector	Textured Reflector

Code	Type	CCT
Luster70.8.K--.--	LED Bollard (Luster) Height 70cm	3000°K / 4000°K
Luster85.8.K--.--	LED Bollard (Luster) Height 85cm	3000°K / 4000°K
Luster95.8.K--.--	LED Bollard (Luster) Height 95cm	3000°K / 4000°K

PRO LIGHT
Pro Light Egypt For Electrical Industries

Address: Plot 137, Extension of the Six Industrial Zone 6th of October City, Giza - Egypt, **Phone:** 0238349235 – 01024507555
Email: info@prolight-eg.com, **Website:** www.prolight-eg.com

GALUX PRO