



SPECIFICATION SHEET

GALUX PRO

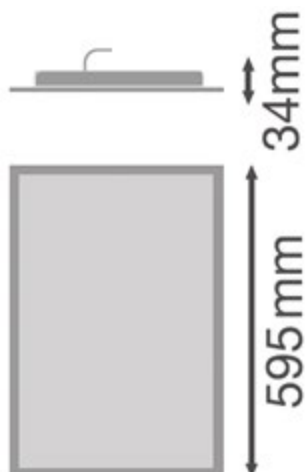

LED Panel 30*60

Light distribution

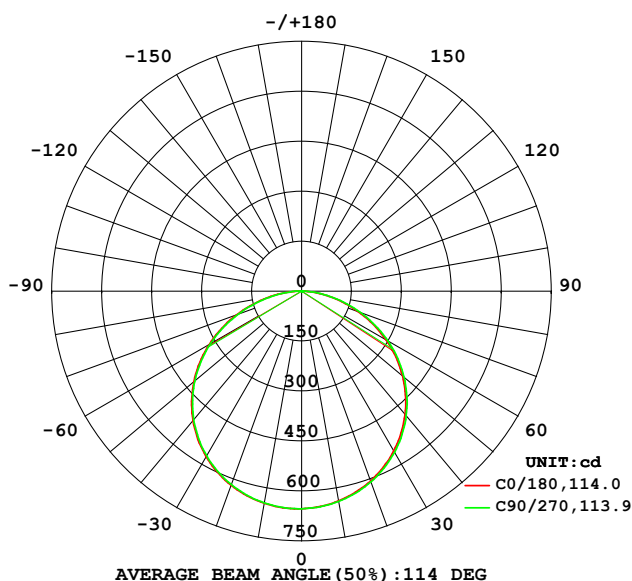

Technical Characteristics

Nominal Power	21W
Total Lumen	2400 LM
LED Type	SMD (LumiLED)
CCT	3000°k-6000°K
CRI	82
Beam Angle	114°
Protection	IP23
Operation Temp.	-5 to 45°C
Dimension	295*595*34 mm
Weight	0.8 Kg
Mounting	Recessed / Surface
Warranty	5 years

Electrical Characteristics

Power Supply	LED Driver (Philips)
Voltage Range	220-240Vac
Power Factor	>0.95
Current (RMS)	0.1125

Materials

Body	Steel
Emitting surface	Polystyrene
Reflector	none

Life time

L70/B50	60000h
L80/B10	50000h

Code	Type	CCT
GL600-300B-R	LED Panel 30*60 Recessed	6000K
GL600-300B-S	LED Panel 30*60 Surface	6000K