


# SPECIFICATION SHEET

**GALUX**PRO



## LED Stairs Grill RD

### Light distribution

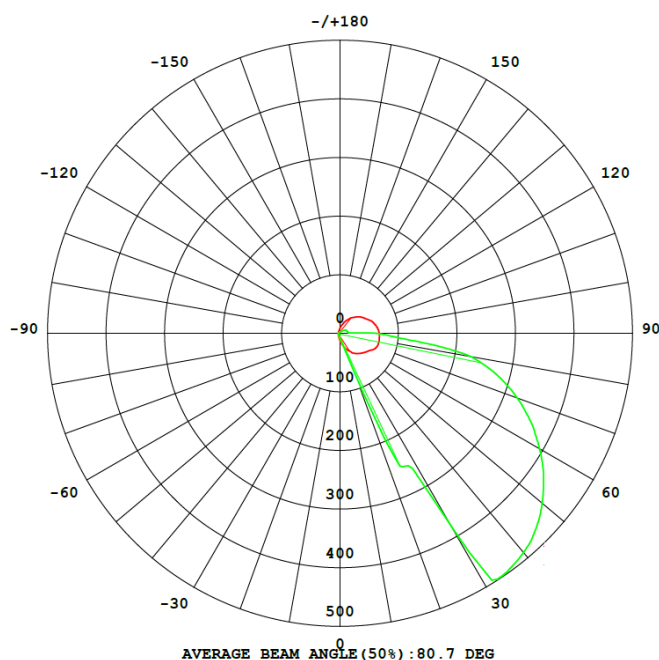

### Technical Characteristics

|                 |                  |
|-----------------|------------------|
| Nominal Power   | 3W               |
| Total Lumen     | 75 LM/W          |
| LED Type        | LED SMD          |
| CCT             | 3000K            |
| CRI             | >70              |
| Beam Angle      | 80°              |
| Protection      | IP65             |
| Operation Temp. | -5 to 55°C       |
| Dimension       | D83mm*T50mm      |
| Mounting        | Recessed in wall |
| Warranty        | 2 - 3 years      |

### Electrical Characteristics

|               |            |
|---------------|------------|
| Power Supply  | LED Driver |
| Voltage Range | 220-240Vac |
| Power Factor  | >0.95      |
| Current (RMS) | 0.017      |

### Materials

|                  |                                                      |
|------------------|------------------------------------------------------|
| Body             | Die casted aluminum<br>& electrostatically<br>coated |
| Emitting surface | Clear glass /<br>Polycarbonate                       |

>> SMD 2835 beads with low power consumption and high lumen

>> Easy to install

>> Widely used for architecture, commercial and landscape lighting