



SPECIFICATION SHEET

GALUX PRO

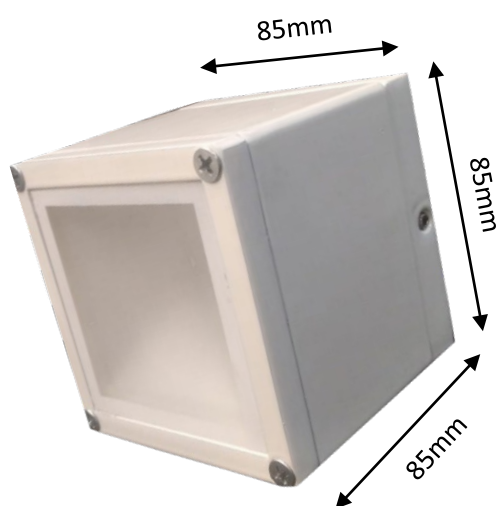

Cylinder Squared Surface

Light distribution

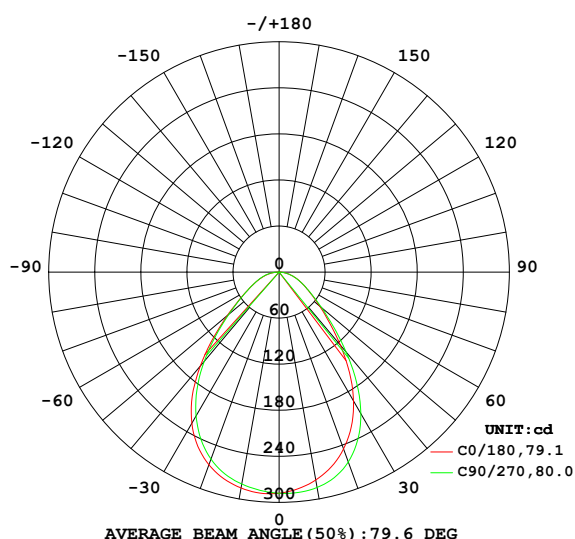

Technical Characteristics

Nominal Power	8W
Total Lumen	600 LM
LED Type	LED SMD
CCT	3000-4000°K
CRI	>80
Beam Angle	80°
Protection	IP65
Operation Temp.	-10 to 55 °C
Dimension	85*85*85mm
Weight	0.4 Kg
Mounting	Surface mounted
Warranty	3 years

Electrical Characteristics

Power Supply	LED Driver (Osram)
Voltage Range	200-240Vac
Power Factor	>0.95
Current (RMS)	0.043

Materials

Body	Electrostatically coated Alu. Sections
Emitting surface	Polycarbonate
Reflector	Textured Reflector

Code	Type	CCT
SQCYS.8.K30.O1S1	LED Cylinder Squared Surface 8W	3000°K
SQCYS.8.K40.O1S1	LED Cylinder Squared Surface 8W	4000°K