


SPECIFICATION SHEET

GALUXPRO



LED Up-Lights

Lighting distribution

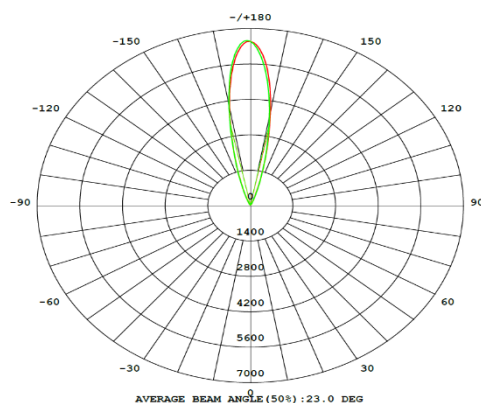

Technical Characteristics

Nominal Power	6W / 9W / 12W 18W / 24W
Total Lumen	100 LM/W
LED Type	LED SMD
CCT	3000K
CRI	>75
Beam Angle	23°
Protection	IP65, IK08
Operation Temp.	-5 to 55°C
Dimensions	6W: D120*H90mm 9W: D150*H90mm 12W: D160*H90mm 18W: D180*H90mm 24W: D220*H90mm
Mounting	Recessed in ground
Warranty	2 - 3 years

Electrical Characteristics

Power Supply	LED Driver
Voltage Range	180 - 265 Vac
Power Factor	>0.9
Current (RMS)	0.03 to 0.1 A

Materials

Body	Stainless steel ring, Die-cast aluminum with heat sink
Emitting surface	Clear glass, tempered, 12mm thickness

Code

Type

UP12V1.06.K30	LED UP-light 6W
UP15V1.09.K30	LED UP-light 9W
UP16V1.12.K30	LED UP-light 12W
UP18V1.18.K30	LED UP-light 18W
UP22V1.24.K30	LED UP-light 24W