


Outdoor Lighting

LED High Bay Jota



Light Distribution

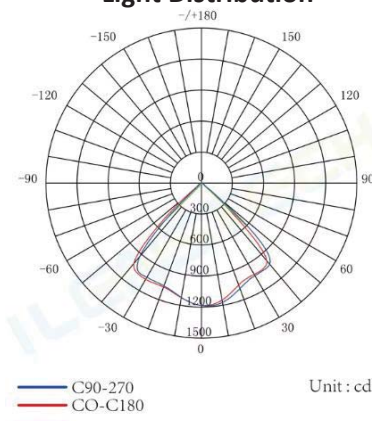

Electrical Data	
Wattage	100-150-200W
Voltage	220-240V
Ampere	0.5-1-1.5mA
Power Factor	>0.95

Photometric Data	
Temperature (K)	4000 or 6000K
Light Color	cool or Day white
SDCM	<5
Lumen	130 Lm/W
Color Rendering index	74
Beam Angle	95

Materials	
Emitting Surface	Clear Glass
Reflector	None
Body	Alu Die-Casted
Ingress Protection	65
Mounting	Suspended
Life Time	36000 hr

Additional Information	
LED Type	Lumiled / Sanan
LED Driver	Philips Driver
Dimensions (mm)	D: 300 x H:120
CODES	Jota.100.K40
	Jota.100.K60

Notes:

Control: ON/OFF.

Warranty is 3 years.

K--: describes the CCT of Lighting fixture, Example **K30** define that CCT is 3000°.



Address: Plot 137, Extension of the Six Industrial Zone 6th of October City, Giza

Phone: 0238349235 – 01024507555

Email: info@prolight-eg.com

Website: www.prolight-eg.com