


SPEIFICATION SHEET

GALUXPRO



LED Lumo Pole

2D Dimensions

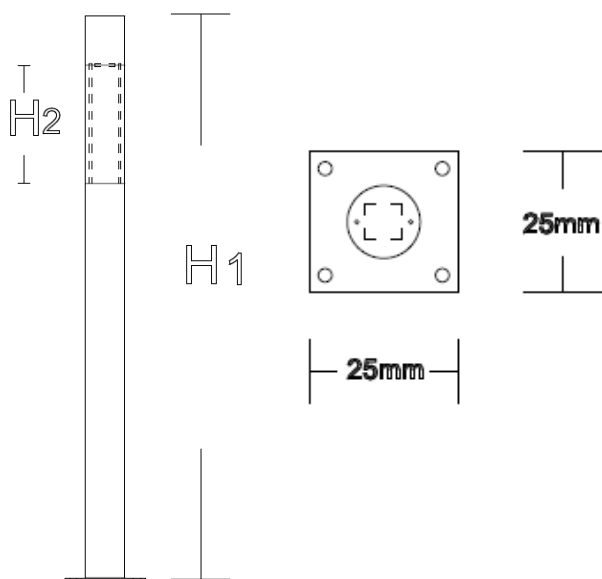

Technical Characteristics

Nominal Power	30 W
Total Lumen	3000 LM/W
LED Type	SMD Lumiled
CCT	3000-4000°K
CRI	>80
Beam Angle	180°
Protection (IP)	IP65
Operation Temp.	-10 to 55 °C
Dimension(mm)	As Shown in drawings
Mounting	Ground mounted
Warranty	3 - 5 years

Electrical Characteristics

Power Supply	LED Driver
Voltage Range	200-240Vac
Power Factor	>0.95
Current (RMS)	144mA

Materials

Body	Electrostatically coated
Emitting surface	Alu. Sections
Reflector	clear glass
	none

Code	Type	CCT
Lumo200.30.K--	LED pole (Lumo) Height 200 cm 30W	3000°K / 4000°K
Lumo250.30.K--	LED pole (Lumo) Height 250 cm 30W	3000°K / 4000°K
Lumo300.30.K--	LED pole (Lumo) Height 300 cm 30W	3000°K / 4000°K