


SPECIFICATION SHEET

GALUXPRO



LED Lighting TavoSQ

2D Dimensions

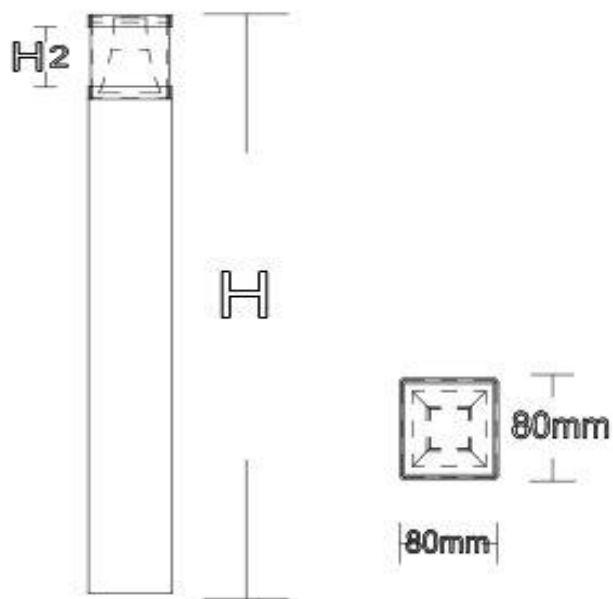

Technical Characteristics

Nominal Power	12W
Total Lumen	100 LM/W
LED Type	LED SMD (LumiLed)
CCT	3000-4000°K
CRI	>80
Beam Angle	180°
Protection (IP)	IP65
Operation Temp.	-10 to 55 °C
Dimension(mm)	As Shown in drawings
Mounting	Ground mounted
Warranty	3 - 5 years

Electrical Characteristics

Power Supply	LED Driver
Voltage Range	200-240Vac
Power Factor	>0.95
Current (RMS)	57 mA

Materials

Body	Electrostatically coated Alu. Sections
Emitting surface	Acrylic (opal diffuser)
Reflector	None

Code	Type	CCT
TavoSQ65.12.K--	LED Bollard (TavoSQ) Height 65cm12W	3000°K / 4000°K
TavoSQ85.12.K--	LED Bollard (TavoSQ) Height 85cm12W	3000°K / 4000°K
TavoSQ95.12.K--	LED Bollard (TavoSQ) Height 95cm12W	3000°K / 4000°K