

Indoor Lighting

LED Panel 30x120 Astra

Electrical Data	
Wattage	40W
Voltage	220-240V
Ampere	0.190mA
Power Factor	>0.95

Photometric Data	
Temperature (K)	3000,4000,6000K
Light Color	Warm, cool or Day white
SDCM	<5
Lumen	4160 Lm
Color Rendering index	80
Beam Angle	114

Materials	
Emitting Surface	Polystyrene
Reflector	None
Body	Steel
Ingress Protection	23
Mounting	Recessed/Surface
Life Time	50000 hr

Notes:


Control: ON/OFF.

Warranty is 5 years.

K--: describes the CCT of Lighting fixture, Example **K30** define that CCT is 3000°.



Light Distribution

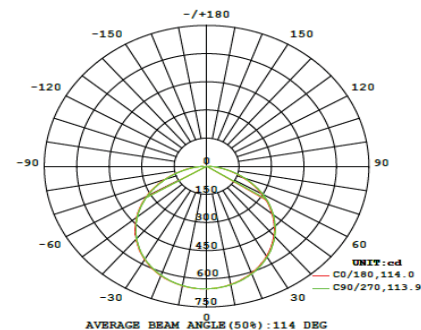

Additional Information	
LED Type	Philips / Osram
LED Driver	Philips / Lifud
Dimensions (mm)	L295XW1195XH34
CODES	Astra.40.K30 R/S
	Astra.40.K40 R/S
	Astra.40.K60 R/S



Address: Plot 137, Extension of the Six Industrial Zone 6th of October City, Giza

Phone: 0238349235 – 01024507555

Email: info@prolight-eg.com

Website: www.prolight-eg.com