

Outdoor Lighting

LED Bollard Jupiter II

Electrical Data	
Wattage	10W
Voltage	220-240V
Ampere	0.047mA
Power Factor	>0.95

Photometric Data	
Temperature (K)	3000 or 4000
Light Color	Warm or cool
SDCM	<5
Lumen	1000 Lm
Color Rendering index	82
Beam Angle	114

Materials	
Emitting Surface	Acrylic
Reflector	None
Body	Die Casted Alu
Ingress Protection	65
Mounting	Floor Mounted
Life Time	36000 hr

Notes:


Control: ON/OFF.

Warranty is 3 years.

K--: describes the CCT of Lighting fixture, Example **K30** define that CCT is 3000°.



2D Dimensions

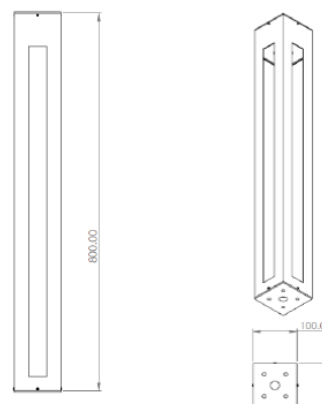

Additional Information	
LED Type	Osram / Philips
LED Driver	Philips/Tridonic/Osram
Dimensions (mm)	H: 800
Thickness	Variant Upon Request
CODES	JupitarII80.10.K30
	JupitarII80.10.K40



Address: Plot 137, Extension of the Six Industrial Zone 6th of October City, Giza

Phone: 0238349235 – 01024507555

Email: info@prolight-eg.com

Website: www.prolight-eg.com