

Indoor Lighting

LED Panel 22.5x22.5 Astra

Electrical Data	
Wattage	15W
Voltage	220-240V
Ampere	0.071mA
Power Factor	>0.95

Photometric Data	
Temperature (K)	3000,4000,6000K
Light Color	Warm, cool or Day white
SDCM	<5
Lumen	1780 Lm
Color Rendering index	80
Beam Angle	114

Materials	
Emitting Surface	Poly carbonate
Reflector	None
Body	Die-casted Alu
Ingress Protection	20/44
Mounting	Surface
Life Time	50000 hr

Notes:


Control: ON/OFF.

Warranty is 5 years.

K--: describes the CCT of Lighting fixture, Example **K30** define that CCT is 3000°.



Light Distribution

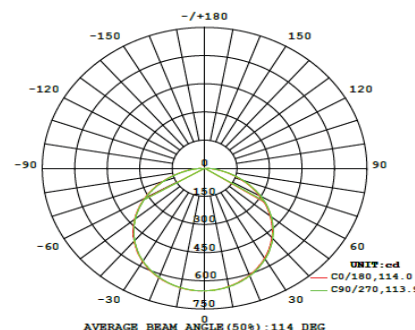

Additional Information	
LED Type	Philips / Osram
LED Driver	Philips / Lifud
Dimensions (mm)	L225XW225XH50
CODES	Astra.15.K30 S
	Astra.15.K40 S
	Astra.15.K60 S



Address: Plot 137, Extension of the Six Industrial Zone 6th of October City, Giza

Phone: 0238349235 – 01024507555

Email: info@prolight-eg.com

Website: www.prolight-eg.com