

Technical Data Sheet


DOWN LIGHT

Nexro

Model No. : Nexro.10



Fixture Dimension

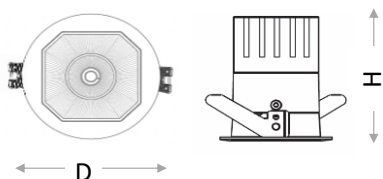

Dimension D: 110 x H: 60 mm

Features

- High Luminous Efficiency
- High Color Quality
- Long Lifespan
- Low Heat Emission



Product Description

- A high-performance LED downlight designed to provide efficient and uniform illumination for modern indoor spaces.
- Featuring a sleek and compact design, it delivers excellent light distribution with low glare, making it ideal for residential, commercial, and hospitality applications. Engineered for energy efficiency and long service life.

Electrical Data

Power :	10 W
Input Voltage :	220-240 VAC
Current :	47.85 mA
Power Factor :	> 0.95

Photometric Data

CCT :	3000/4000/6000°K
Total Flux :	1100 Lm
CRI :	> 80
Beam Angle :	60°


Material Data

Emitting Surface :	Clear Glass
Reflector :	High purity Alu.
Body :	Plastic Body
IP / IK :	65 / 05

Components Specs

LED Type :	PHILIPS / OSRAM
Driver Type :	PHILIPS / TRIDONIC / DONE
Dimming System :	ON / OFF
Life Time :	50,000 hrs

Lighting Disturbution



Address: Plot 137, Extension of the Six Industrial Zone 6th of October City, Giza

Phone: 0238349235 – 01024507555

Email: info@prolight-eg.com

Website: www.prolight-eg.com