

Indoor Lighting

LED Down Light Evora

Electrical Data	
Wattage	8W
Voltage	220-240V
Ampere	0.038mA
Power Factor	>0.95

Photometric Data	
Temperature (K)	3000,4000,6000K
Light Color	Warm, cool or Day white
SDCM	<5
Lumen	1000 Lm
Color Rendering index	80
Beam Angle	24/40/60

Materials	
Emitting Surface	Acrylic Lens
Reflector	None
Body	Die Casted Alu
Ingress Protection	20
Mounting	Recessed
Life Time	50000 hr

Notes:


Control: ON/OFF.

Warranty is 5 years.

K--: describes the CCT of Lighting fixture, Example **K30** define that CCT is 3000°.



Light Distribution

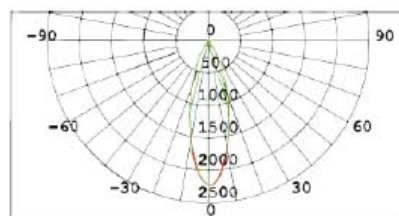

Additional Information	
LED Type	COB (Philips)
LED Driver	Philips/Tridonic/Osram
Dimensions (mm)	H97xD88
CODES	Evora88.8.K30
	Evora88.8.K40
	Evora88.8.K60



Address: Plot 137, Extension of the Six Industrial Zone 6th of October City, Giza

Phone: 0238349235 – 01024507555

Email: info@prolight-eg.com

Website: www.prolight-eg.com